

Electric towing tractor

Tracto

R-series
TE501



Electric towing tractor 50.0 ton

IDENTIFICATION

1.1	Manufacturer			CESAB
1.2	Model			TE501
1.3	Drive			Electric
1.4	Operator type			Sit-on
1.5	Load capacity/rated load ¹⁾	Q	kg	50000
1.7	Rated drawbar pull	F	N	10000
1.9	Wheelbase	y	mm	2025

WEIGHT

2.1	Service weight		kg	5700
2.2	Axle load, with load, front/rear		kg	2570 / 3490
2.3	Axle load, without load, front/rear		kg	2370 / 3330

WHEELS

3.1	Tyre - Cushion(Cu), Extra-elastic(SE), Pneumatic(Pn), Polyurethane			SE/Pn
3.2	Wheel size, front			6.50-10
3.3	Wheel size, rear			250-15
3.5	Wheels, number front/rear (x = driven wheels)			2/2x
3.6	Track width, front	b ₁₀	mm	1115
3.7	Track width, rear	b ₁₁	mm	1130

DIMENSIONS

4.7	Height of cab	h ₆	mm	1900
4.8	Seat height	h ₇	mm	890
4.12	Coupling height	h ₁₀	mm	345 - 400 - 455 - 510 - 565
4.13	Loading height, unloaded	h ₁₁	mm	1100
4.16	Length of loading surface	l ₃	mm	1805
4.17	Overhang	l ₅	mm	515
4.18	Width of loading surface	b ₉	mm	1060
4.19	Overall length	l ₁	mm	3523
4.21	Overall width	b ₁	mm	1355
4.32	Ground clearance, centre of wheelbase	m ₂	mm	190
4.35	Turning radius	W _a	mm	3680
4.36	Internal turning radius	b ₁₃	mm	1515

PERFORMANCE DATA

5.1	Travel speed, with/without load	km/h	7 / 16
5.6	Max. drawbar pull	N	29000
5.7	Gradeability	%	See chart
5.8	Max. gradeability loaded/unloaded	%	See chart
5.10	Service / parking brake (I=Hydraulic E=Electromagnetic M=Mechanical)	I / I	
5.10.1	Type of service brake front/rear		Disk / mult. disks

ELECTRIC MOTOR

6.1	Drive motor rating S2 60 min	kW	26
6.3	Battery according to DIN 43531 / 35 / 36 A, B, C, no		43536 A
6.4	Battery voltage, nominal capacity ²⁾	K ₅	V/Ah 80 / 930
6.5	Battery weight	kg	2288
6.6	Energy consumption according to EN 16796	kWh/h	15,07

OTHERS

8.1	Electronics control		Inverter AC
8.4	Sound level at driver's ear according to EN 12053	dB(A)	69

1) Loading surface capacity: 200 kg.

2) Performances and weight are intended with 930 Ah battery.

As per VDI guidelines 2198, this datasheet applies to standard electric tractor / platform truck only.

Dimensions are not binding and can be changed in any moment. The performances must be intended for brand new machines, after having completed the running-in tested in CESAB factory in normal climatic conditions.

Performances and weight are to be intended with standard motors and battery and with superelastic tires.

Some data can vary according to different equipments.

Towed weight

EXAMPLE OF GRAPH READING:

TOWED LOAD = 10 t







GRADIENT (i) = 4 %

DRAWBALL PUL (F) = 10000 N

SPEED (V0) = 8 km/h


MAX. PRACTICABLE RAMP LENGTH (s) = 9,5 km

Tracto

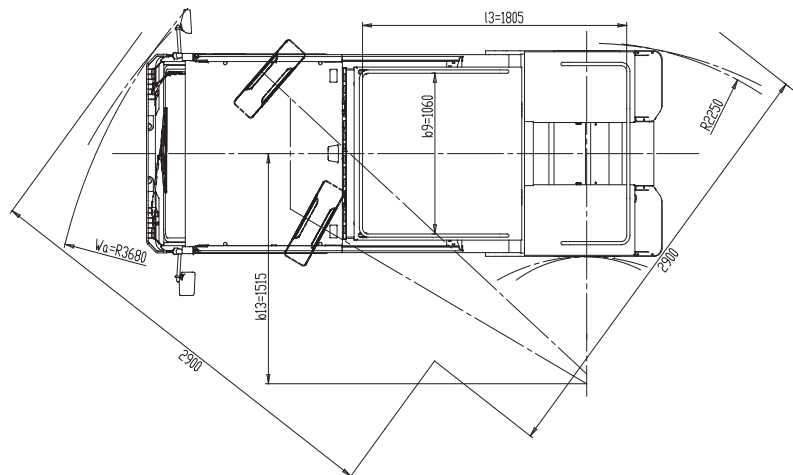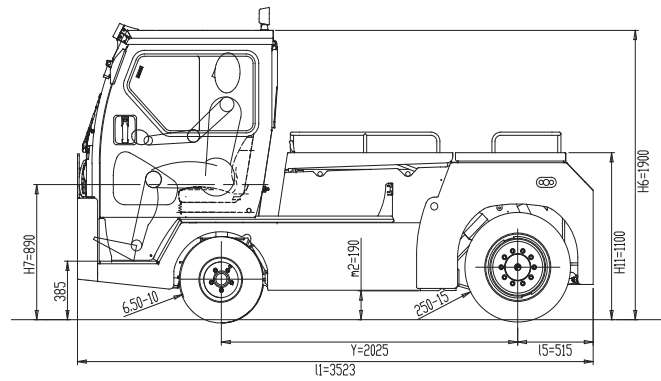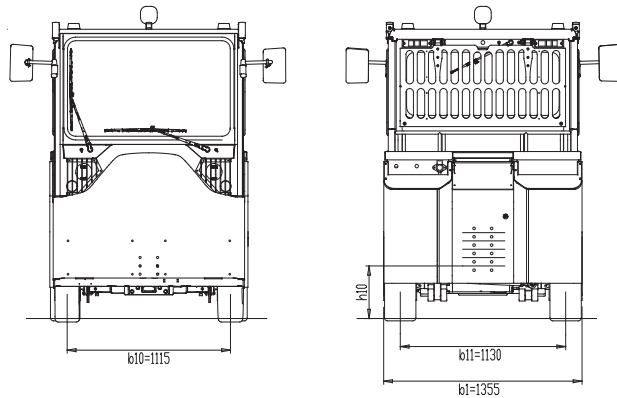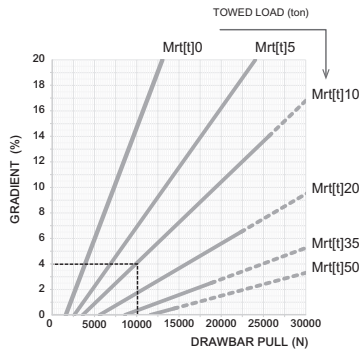

Standard equipments

- Inching buttons
- Hydraulic steering
- AC power system
- High-thickness polyethylene bumpers in front and rear
- Brakes on all four wheels
- Adjustable steering column
- Rear motion buzzer
- Rear platform with 200 kg capacity
- Digital display
- Digital dashboard including battery charge level pilot, trouble shooting check system, speedometer, odometer and hourcounter



CMHE-CESAB MATERIAL HANDLING EUROPE - Version 1, 06-03-2025